Hi Resolution Video to VGA Converter

ITEM NO.: AD001H Hi Resolution Video to VGA Converter with BNC loop out





Features:

- Special designed for computer VGA monitor, LCD color monitor.
- Dual output: DB15 x 1 for VGA monitor and BNC x 1 for TV monitor.
- Support NTSC, PAL video system.
- Input video system 50 to 60Hz frame rate detection (NTSC/PAL).
- The DEINTERLACED and Scan rate conversion output mode: 800 x 600, 1024 x 768, up to 1280*1024@60Hz.
- Frequency output: 60Hz, 75Hz, 85Hz.
- On screen display function: Contrast, Brightness, Color, Tint, Features, Resolution.
- Built in ESD protection.
- Built in video auto gain control for good quality picture.
- Power Supply Included.

Operation Controls and Function:

- 1. Conversion LED off: Press button to start conversion mode.
- 3. Conversion LED on and OSD off: Press or to display OSD main menu OSD.
- 4. Conversion LED on and Press and button together to Initialize factory default value.

Main Menu:

Picture Features Resolution Exit

Button Function:

◀ ▶ Up, down

Enter

Picture Menu:

Contrast Brightness Color Tint Save

Button Function:

Decrease / increase

Next item

Features Menu:

OSD Mode Sharpness Motion Motion Value Save

Button Function:

Select feature setup

Next item

Resolution Menu:

<u>800x600@60Hz</u>, <u>800x600@75Hz</u>, <u>800x600@85Hz</u>, <u>1024x768@60Hz</u>, <u>1024x768@75Hz</u>, <u>1280x1024@60Hz</u> Save


Button Function:

Select resolution setup


Next item

NOTE: Wrong Resolution setting will cause the picture not display, please initialize factory default value.

View of Connection and Installation:

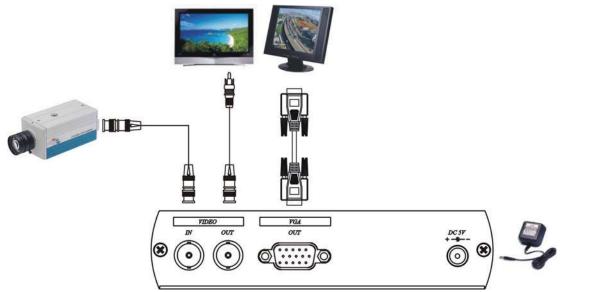

Panel View:



Specification:

ITEM NO.	AD001H
Input Signal	BNC [,] 75Ω [,] 0.7 Vp-p
Output Signal	VGA: 0.7 Vp-p RGB, 15 pin D female connector
	BNC ,75Ω,0.7 Vp-p
Power Consumption	1200mA (Max.)
Power Supply	DC5V 2Amp Regulated Power Supply
Temperature	Operation: 0 to 55°C Storage: -20 TO 85°C, Humidity: up to 95%
Dimension W x H x D mm	140 x 112 x 32
Weight g	360

Rohs (EFC C