

WAT-2400 1/2.8" Full HD Network Camera


Full HD CMOS sensor



Key features

- Customization flexible firmware (Required software can be included to the camera)
- 1/2.8-inch 2M CMOS image sensor with high sensitivity
- Min. illumination 0.1 lx F1.2 (AGC HIGH=66dB, Shutter=OFF)
- H.264 Video compression format
- PoE (IEEE802.3af) & DC+12V input
- ONVIF® profile S compliant

Dimensions

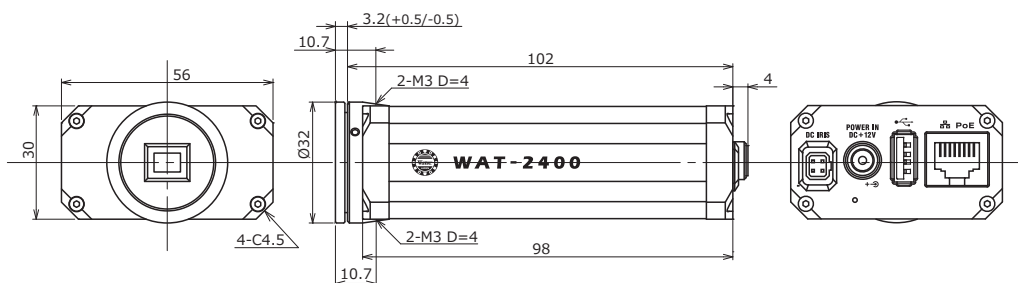



Specifications

Pick-up element	1/2.8 inch CMOS image sensor	
Number of effective pixels	1994(H) × 1244(V)	
Unit cell size	2.8μm(H) × 2.8μm(V)	
Imaging system	RGB+W array mosaic filters on chip	
Synchronizing system	Internal	
Scanning system	Progressive	
Output size	1920×1080, 1280×720	
Max. frame rate	30 fps	
Video compression	H.264, MJPEG	
Minimum illumination	0.1 lx F1.2 (AGC HIGH=66dB, Shutter=OFF)	
S/N	More than 50dB (AGC OFF=0dB, γ=1.0)	
Function settings	Browser	
AE mode	Fixed	1/5 - 1/10000 sec. (1/10000 sec. step)
	EI	1/30 - 1/10000 sec.
White balance	ATW, PWB, MWB	
AGC	ON	0 - 42dB
	OFF	—
MGC	0 ~ 66dB (3dB step)	
Day/Night	—	
Noise reduction	—	
Wide dynamic range	—	
Lens iris	DC	
Back light compensation	—	
White blemish correction	—	
Sharpness	Level adjustable	
Defog	—	
Digital zoom	—	
Privacy mask	—	
Mirror image	—	
Freeze	—	
Motion detection	—	
Neg.image	—	
ONVIF	profile S	
Supported protocols	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP,	
	HTTP, FTP, DHCP, DNS, TELNET, SSH, SNMP, ARP, ICMP, Bonjour	
Interface	RJ45 (10BASE-T, 100BASE-TX), USB (High Speed / Full Speed), Auto iris, Power in	
Power supply	PoE +48V, DC+12V±10%	
Power consumption	5.4W/450mA (DC+12V), 5.6W/127mA (PoE+48V)	
Operating temperature	-10 - +40℃	
Storage temperature	-30 - +70℃	
Operating / Storage humidity	95% RH or less (Without condensation)	
Lens mount	CS mount (Back focus adjustable)	
Weight	Approx. 195g	
Accessories	WPDC12 (DC Plug), Hex. Wrench, B007 (Camera Bracket), Clamp Filter	


※ ONVIF is a trademark of Onvif, Inc.

Accessories Options

*see www.variovision.tv for more lens options

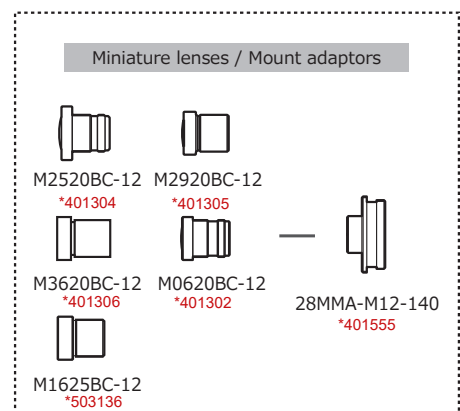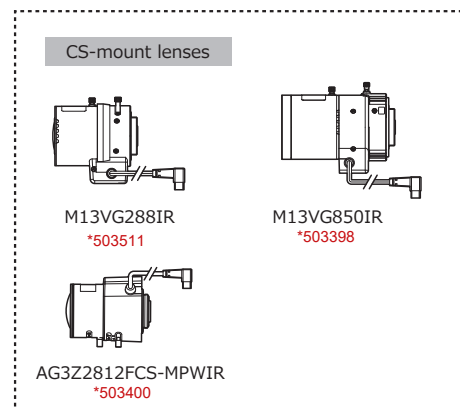

C-mount lenses




*see www.variovision.tv for options

C-mount adaptor


30CMA-R *402806

*xxxxx = Variovision Art.N.

WAT-2400



POWER IN (DC+12V)



Power supply adaptors



SWI12-12-N-P5



SWI12-12-E-P5
*303046

PoE



LAN cable
(Shielded cable recommended)


*see www.variovision.tv for more options



HUB
PoE (IEEE802.3af)



LAN cable



Camera bracket

B007

Clamp filter



NVR



PC
VMS / Browser / Others

*see www.variovision.tv for more options


Stands




MS50
*402599



WH-31
*303040



WH-11
*303041



WH-21
*303042

*see www.variovision.tv for more options


Water resistant camera housing / Mounting brackets



VCHO-15S



WH-6N



PTP-300

*see www.variovision.tv for more options