

WAT-902H2 ULTIMATE 1/2" Multi-Function · High Sensitivity Camera


NIR visibility with full camera control



Key features

- Min. illumination 0.0001 lx. F1.4 by NIR sensitive CCD sensor and our unique image signal amplifying circuit
- High quality image without noise under poor light condition
- Signal amplification level configurable up to 60dB and suitable for moving object in low light condition
- Electric iris, electric shutter, AGC, MGC, BLC and gamma
- Adjustable back focus CS mount
- Stability design housing for installation

Dimensions

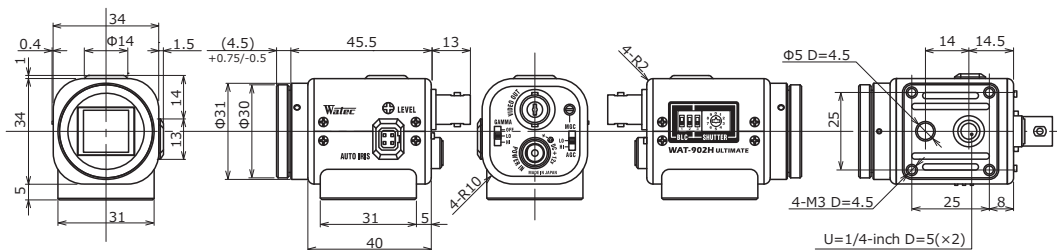


Specifications

		EIA	CCIR
Video standard		EIA	CCIR
Pick-up element		1/2 inch interline transfer CCD image sensor	
Number of effective pixels		768(H) × 494(V)	752(H) × 582(V)
Unit cell size		8.4μm(H) × 9.8μm(V)	8.6μm(H) × 8.3μm(V)
Synchronizing system		Internal	
Scanning system		2:1 interlace	
Video output		Composite video, 1.0 V(p-p) 75Ω (Unbalanced)	
Resolution (H)		More than 570TVL (Center)	
Minimum illumination		0.0001 lx F1.4 (AGC HIGH=60dB, Shutter=OFF)	
S/N		More than 50dB (AGC OFF=5dB, γ=1.0)	
Function settings		DIP Switch	
AE mode	Fixed	1/60, 1/100 sec.	1/50, 1/120 sec.
	EI	1/250, 1/500, 1/1000, 1/2000, 1/5000, 1/10000, 1/100000 sec.	1/50 - 1/100000 sec., 1/120 - 1/100000 sec.
AGC	ON	5 - 32dB (LOW), 5 - 60dB (HIGH)	
	OFF	-	
MGC		5 - 60dB	
Gamma characteristics		γ≈0.35, 0.45, 1.0	
Video level		100IRE	
Noise reduction		-	
Wide dynamic range		-	
Lens iris		Video / DC (EIAJ, Auto-select)	
Back light compensation		BLC	
White blemish correction		-	
Sharpness		-	
Defog		-	
Digital zoom		-	
Privacy mask		-	
Mirror image		-	
Freeze		-	
Motion detection		-	
Neg.image		-	
Interface		BNC (Composite Video), Power in, Auto iris	
Power supply		DC+12V±10%	
Power consumption		1.32W (110mA)	
Operating temperature		-10 - +40°C	
Storage temperature		-30 - +70°C	
Operating / Storage humidity		95% RH or less (Without condensation)	
Lens mount		CS mount (Back focus adjustable)	
Weight		Approx. 98g	
Accessories		WPDC12 (DC plug), AIG-G (Iris plug), Hex. Wrench	


Options

C-mount lenses / Mount adaptors
*see www.variovision.tv for more lens options

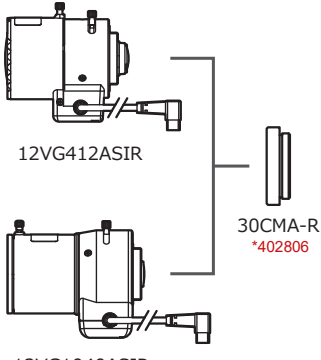


12VG412ASIR
30CMA-R *402806
12VG1040ASIR

Miniature lenses / Mount adaptors





0814BC-12 *401618
28MMA-M12-140 *401555

CS-mount lenses




*see www.variovision.tv for options

WAT-902H2 ULTIMATE

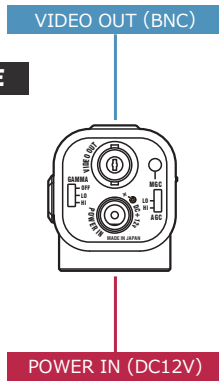


Cables



3C2V (BNC/BNC) *503291
3C2V (BNC/RCA) *402607




Power supply adaptors




SWI12-12-N-P5
SWI12-12-E-P5 *303046

Stands

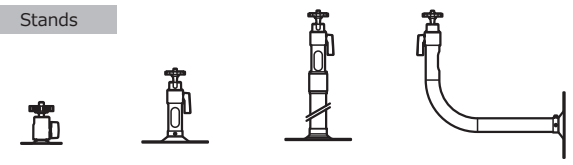

MS50 *402599
WH-31 *303040
WH-11 *303041
WH-21 *303042

Water resistant camera housing / Mounting brackets

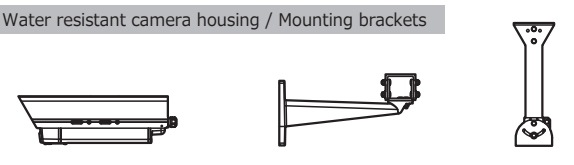

VCHO-15S
WH-6N
PTP-300
*see www.variovision.tv for more options

*xxxxx = Variovision Art.N.