


WAT-902HB3S 1/3" High Sensitivity Board Camera

NIR sensitivity with multi function

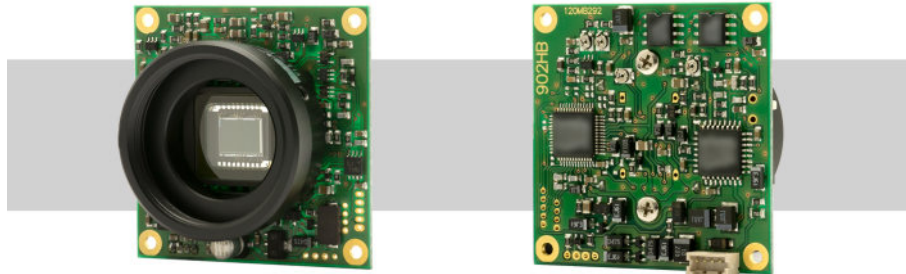


*NO CE & FCC

Key features

- Equality performance on NIR sensitivity and features to WAT-902H series
- Selectable camera settings for demanding scene conditions
- Electric iris, electric shutter, AGC, BLC and gamma switching

Dimensions

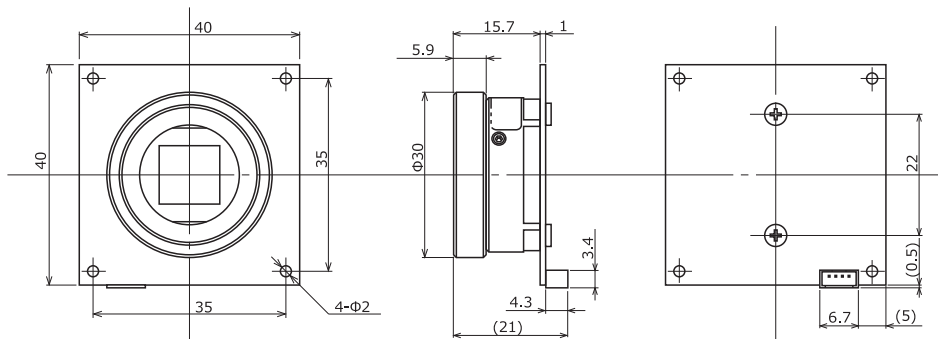


Specifications

Video standard		EIA	CCIR
Pick-up element		1/3 inch interline transfer CCD image sensor	
Number of effective pixels		768(H) × 494(V)	752(H) × 582(V)
Unit cell size		6.35μm(H) × 7.4μm(V)	6.5μm(H) × 6.25μm(V)
Synchronizing system		Internal	
Scanning system		2:1 interlace	
Video output		Composite video, 1.0 V(p-p) 75Ω (Unbalanced)	
Resolution (H)		More than 570TVL (Center)	
Minimum illumination		0.0006 lx F1.4 (AGC HIGH=50dB, Shutter=OFF)	
S/N		More than 50dB (AGC OFF=5dB, γ=1.0)	
Function settings		DIP Switch	
AE mode	Fixed	1/60, 1/100 sec.	1/50, 1/120 sec.
	EI	1/250, 1/500, 1/1000, 1/2000, 1/5000, 1/10000, 1/100000 sec.	
AGC	ON	1/60 - 1/100000 sec.	
	OFF	1/50 - 1/100000 sec.	
MGC		5 - 32dB (LOW), 5 - 50dB (HIGH)	
Gamma characteristics		5dB	
Video level		-	
Noise reduction		γ≠0.45, 1.0	
Wide dynamic range		100IRE	
Lens iris		-	
Back light compensation		Video	
White blemish correction		BLC	
Sharpness		-	
Defog		-	
Digital zoom		-	
Privacy mask		-	
Mirror image		-	
Freeze		-	
Motion detection		-	
Neg.image		-	
Interface		4P connector (Composite Video, Power in)	
Power supply		DC+12V±10%	
Power consumption		1.92W (160mA)	
Operating temperature		-10 - +40°C	
Storage temperature		-30 - +70°C	
Operating / Storage humidity		95% RH or less (Without condensation)	
Lens mount		CS mount	
Weight		Approx. 30g	
Accessories		4P cable, Hex. Wrench	


Accessories
 Options

WAT-902HB3S

CS-mount lenses




**see www.variovision.tv for options*

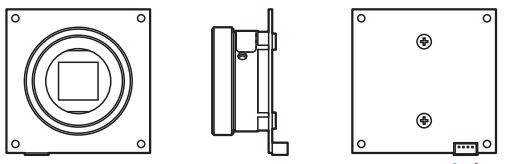

Miniature lenses / Mount adaptors

 3745B-13P <i>*402825</i>	 22PMA-M13-040 <i>*401596</i>
 2520BC-12 <i>*402911</i>	 0814BC-12 <i>*401618</i>
 2920BC-12 <i>*402912</i>	 1220BC-12 <i>*402917</i>
 3820BC-12 <i>*402914</i>	 M1616BC-12 <i>*401308</i>
 0625BC-12 <i>*402915</i>	 2540EX014-M12 <i>*402918</i>
 0820BC-12 <i>*402916</i>	 22PMA-M12-125 <i>*401595</i>

C-mount lenses



**see www.variovision.tv for options*

C-mount adaptor

30CMA-R **402806*

Cable

4P cable (300mm)

Cable with connectors

CB-02 **401287*

Power supply adaptors

SWI12-12-N-P5

SWI12-12-E-P5 **303046*

Cables

1.5C2V (BNC/BNC)

3C2V (BNC/BNC) **503291*

3C2V (BNC/RCA) **402607*

VIDEO OUT (BNC)

VIDEO OUT (BNC)

VIDEO OUT (RCA)



**see www.variovision.tv for options*

**xxxxx = Variovision Art.N.*